
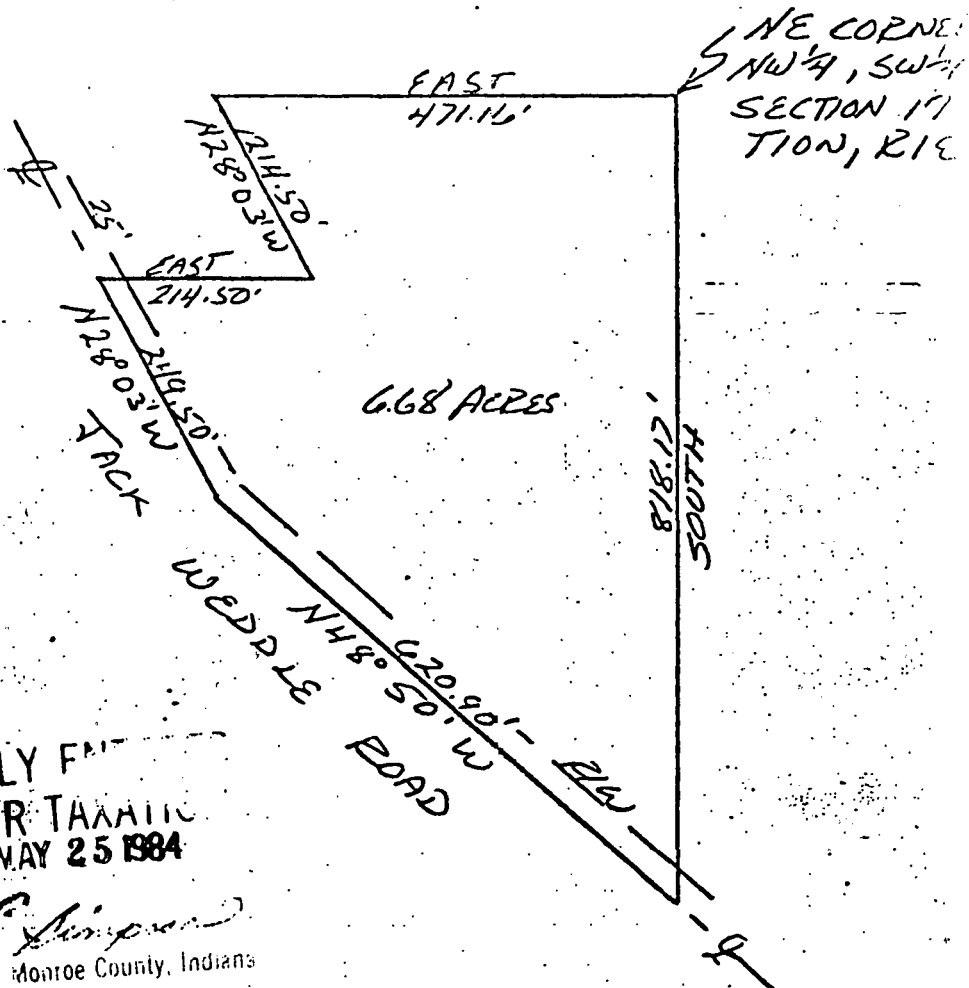


T10N-R01E-17_0000_MCS


For Auditor

Mc CLOUD

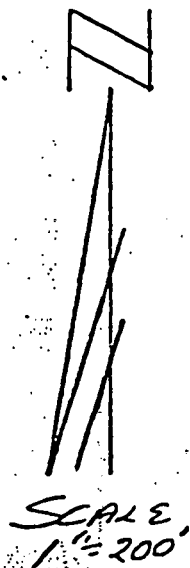

DESCRIPTION:

A part of the Northwest quarter of the Southwest quarter in Section 17, Township 10 North, Range 1 East, Monroe County, Indiana, bounded and described as follows: Beginning at the Northeast corner of said quarter quarter in said Section 17, thence running South on the East line of said quarter quarter for 818.17 feet and to the centerline of the Jack Weddle Road, thence leaving said quarter quarter line and running with said road centerline North 48 degrees 50 minutes West for 620.90 feet, thence on said centerline North 28 degrees 03 minutes West for 214.50 feet, thence leaving said road centerline and running East for 214.50 feet, thence North 28 degrees 03 minutes West for 214.50 feet, and to the North line of said quarter quarter, thence running with said quarter quarter line East for 471.16 feet and to the point of beginning. Containing in all 6.68 acres, more or less. Subject to a 25.00 foot easement from the centerline of said Jack Weddle Road for County Highway right-of-way.



Raymond Graham
 Raymond Graham
 R.P.E. 8409 L.S. 9978 Indiana
 3215 N. Smith Pike
 Bloomington, Indiana
 May 3, 1984

36 poles & 15 links till said line. Stake said back near an Area
10 inches and Elms 9 inches on the S. W. Band of east beach.
James Hoff and Robert Buckner Chain Run Survey
S. S. Buckner M. C. S.


J Buckner C	Jones	Burns	
James Henderson	Jones	Burns	
James Henderson	Henderson	Jones	
Jones	James Henderson	Jones	Henderson Steff

February the 20th 1860
From the following lines and corners
the following corners in section 19
T. 10. N. of R. 10. E. 1. 6 for
J. S. Buckner James Henderson
Reuben Henderson Reuben Steff
Jones and Burns
Corners at the S. W. corner A.
Witness Beach 20 inches in diameter
S. 1/2 E. 28 links dist Beach 10 inches
in diameter S. 1/2 E. 20 1/2 links dist
Elms N. 5 W. 80 poles & 22 links from

Witness Beach 8 inches N. 5 W. 80 links dist W. Oak 3 inches in
diameter S. 1/2 E. 25 links dist Thence N. 5 W. 161 poles & 12 links
to corner C. Witness Sugar 1 inch in diameter S. 1/2 W. 18 links dist
Ash 1 inch in diameter S. 1/2 E. 41 links dist
Then commences at Section 19 side stake corner D. Witness (S. 1/2 W. 11 links dist
diameter) Hickory 10 inches in diameter S. 1/2 E. 21 links dist. Then commences at
the S. E. corner E. Witness Beach 12 inches S. 1/2 E. 10 links dist Beach
15 inches in diameter S. 1/2 E. 48 links dist. Then commences at the S. W.
then corner A. Run S. 1/2 E. 80 poles & 12 links to corner F. Witness W. Oak
12 inches in diameter S. 1/2 E. 153 links W. Oak 9 inches in diameter S. 1/2 E.
52 links dist Thence S. 1/2 E. N. 5 E. 80 poles & 12 links to corner C. Witness
B. Sum 8 inches in diameter N. 5 E. 29 links dist R. Oak 6 inches in diameter
N. 5 W. 28 links dist Thence N. 5 W. 77 poles & 21 links to corner H. Witness
W. Oak 3 inches in diameter S. 1/2 E. 25 links dist W. Oak 10 inches in diameter
N. 5 W. 74 links dist Thence N. 5 W. 77 poles & 21 links corner I. Witness
S. Oak 3 inches in diameter N. 5 W. 12 links dist Beach 9 inches in diameter
S. 1/2 W. 76 links dist Thence N. 5 W. 77 poles & 21 links to corner J. Witness
Beach 9 inches in diameter S. 1/2 E. 1 links dist Maple 9 inches in diameter
N. 5 W. 112 links dist Thence N. 5 W. 77 poles & 21 links to Northern 1/2 of 1st
Thence S. 1/2 W. 77 poles & 7 links to corner L. Witness Sugar 18 inches in diameter
S. 1/2 W. 26 links dist R. Oak 22 inches in diameter S. 1/2 W. 27 links dist
Thence S. 1/2 E. 222 pole 22 links to corner M. Witness Beach 12
inches in diameter N. 5 E. 6 links dist W. Oak 15 inches in diameter
S. 1/2 W. 21 links dist Thence N. 5 W. 80 poles & 22 links to

corner N. Witness Appleton 2 inch in diameter N. 87° W 92 links dist
 then N. 80° W 80 poles + 21 links to corner O. Witness Chestnut Oak 12 inches in
 diameter N. 87° W 22 links dist. S. Oak 10 inches in diameter S. 80° W 112 links dist
 Joseph Hawburn & James Hendricks Chas. B. Brown Surveyors

J. S. Burdick M. C. Surveyor

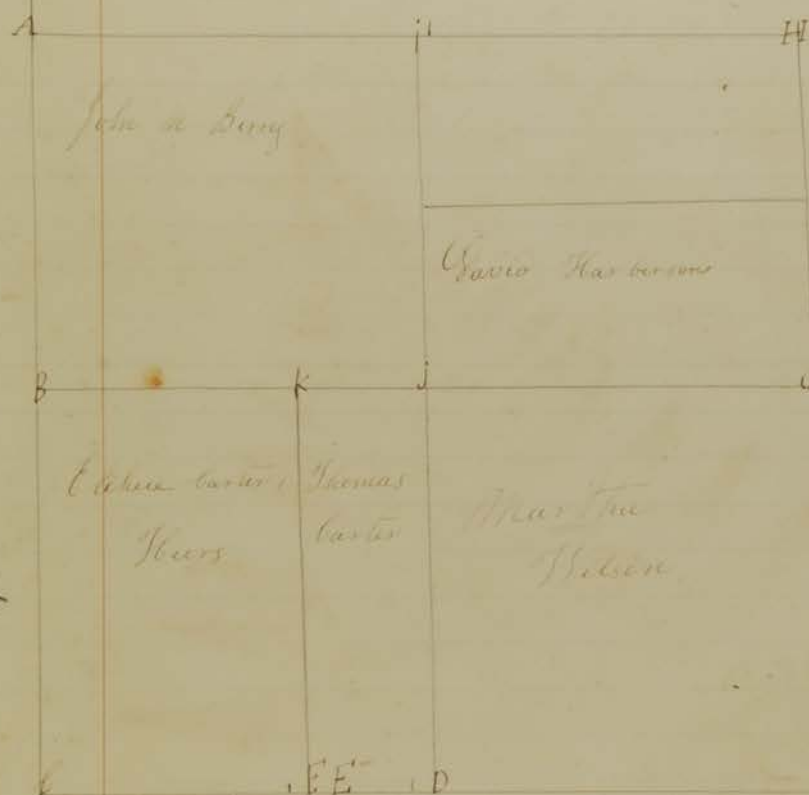

February the 27th 1860

and the following lines were established
 the following corner in Section 15. T. 1. N. 1. E.
 1. 2. West for David Harrison
 John M. Berry Charles Carter Thomas
 Thomas Carter & Martha Wilson
 commenced at S. W. corner A. Witness
 Sugar 15 inches S. 80° E 44 links dist
 Beach 30 inches S. 80° E 13 links dist
 then S. 80° E 111 poles + 15 links to Western
 1/2 mile stake corner B. Witness
 Sugar 15 inches S. 80° E 79 links dist
 to 15 inches S. 80° E 81 links dist
 then S. 80° E 112 poles + 8 links to S. W.
 corner C. Witness
 Sugar 12 inches S. 82° W 184 links
 to 10 inches S. 85° W 101 links

then S. 80° E 101 poles and 2 links to Southern 1/2 mile stake Witness Sugar 20 inches
 S. 80° E 11 links dist Sugar 20 inches S. 82° E 10 links dist then S. 80° W 50 poles
 corner E. Witness W. Cherry 2 inches S. 80° E 114 links dist E. Walnut 12 inch S. 80°
 E 322 links dist then S. 80° W 9 poles + 112 links to corner F. Witness Elm 144 inches
 S. 80° E 44 links dist then commenced at the Eastern 1/2 mile stake corner G.
 Witness Sugar 22 inches S. 80° E 68 links dist Elm 30 inches S. 80° W 215 links
 dist then S. 80° W 101 poles + 34 links to the S. E. corner H. This corner
 was made by crossing the section line at being in an old pole then
 S. 80° W to the Northern 1/2 mile stake corner I. Witness Beach 13 inches
 S. 80° W 75 links dist Beach 20 inches S. 82° E 68 links dist then S. 80° E
 111 poles + 15 links to the center of the section corner J. Witness Beach 12 inches
 S. 80° E 11 links dist Sugar 15 inches S. 80° W 51 links dist then S. 80° W 59
 poles + 112 links corner K. Witness Beach 18 inches S. 80° W 392 links dist
 Beach 20 inches S. 80° E 101 links dist then established the S. E. corner L.
 Witness Beach 30 inches West 11 links dist Beach 23 inches S. 80° W 11 links
 Chas. Brown Jesse Williams George Brown & John M. Berry Surveyors

J. S. Burdick M. C. Surveyor